ClimSel^{™C32}





Typically used for passive cooling/ heating of people and animals, as well as for thermal management of electronics.

Product description

ClimSel™ C32 is a salt hydrate based Phase Change Material that works by either the charging or discharging of energy at different temperatures. ClimSel™ C32 is delivered in various sizes of aluminium foil pouches, as a primary packaging. The main components are sodium sulphate, water and additives.

Physical data

Phase change temperature: Solid	28°C / 82°F
Phase change temperature: Liquid	32°C / 90°F
Latent heat of fusion (see curve)	40 Wh/kg - 145 kJ/kg (±10%)
Specific heat capacity: Solid	1.7 Wh/kg – 6 kJ/kg (±10%)
Specific heat capacity: Liquid	0.8 Wh/kg - 3 kJ/kg (±10%)
Density: Liquid	1.5 kg/l
Thermal conductivity: Solid	0.76 W/mK (±10%)
Thermal conductivity: Liquid	1.08 W/mK (±10%)
pH Value	Approx. 9

Estimated functionality time

 $ClimSel^{TM}$ C32 can be used/cycled as long as the primary packaging is kept uncompromised and it is handled in accordance with usage guidelines. The product will only work as declared for as long as the pouch is intact. The estimated functionality time can be affected by type of application and other external factors.

Contact Climator for further information.

Usage guidelines

- Recommended storage temperature: 10°C to 25°C / 50°F to 77°F.
- Recommended min. and max. temperature is 0°C to +38°C / 32°F to 100°F.
- Preparation before use depends on application conditions.
- Handle the ClimSel[™] C32 pouch with care and do not bend when solid.
- Do not use damaged pouch, as the product functionality will be compromized.
- The product should not be opened or tampered with.
- If in contact with skin, wash with soap and water.
- If in contact with eyes, immediately flush with plenty of water.

32°C

Climator is one of the world's leading companies within Phase-change material (PCM) and temperature stabilization solutions.

Through our know-how, PCM expertise and innovation power, we develop project-based solutions that solve our customers' temperature stabilization and control problems.

We operate within five application areas.



Transport



Room



Equipment



Climator Sweden AB

Mejselvägen 15 SE-541 34 Skövde SWEDEN


+46 (0)500 48 23 50 www.climator.com climator@climator.com




linnSel™^{C32}

Phase change properties

Part Enthalpy (J/g)

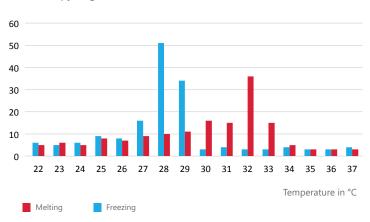

Enthalpy (J/g)

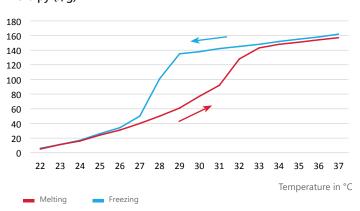

Waste Management

For disposal of the product please contact your federal, state or local waste management organisation. The product should be treated in accordance with requirements for EWC (=European Waste code) = 060314.

Climator is one of the world's leading companies within Phase-change material (PCM) and temperature stabilization solutions.

Through our know-how, PCM expertise and innovation power, we develop project-based solutions that solve our customers' temperature stabilization and control problems.

We operate within five application areas.



Transport



Room



Equipment



Climator Sweden AB

Mejselvägen 15 SE-541 34 Skövde **SWEDEN**

+46 (0)500 48 23 50 www.climator.com climator@climator.com

